TIGERFLOW

OCELOT BOOSTER

www.tigerflow.com



• APPLICATIONS

Schools | Hotels | Apartment Buildings | Agricultural Irrigation | Residential Homes

TIGERFLOW®


OCELOT BOOSTER

• STANDARD FEATURES

- Permanent magnet motor with integrated VFD
- Adjustable pressure setpoint through easy-to-use interface
- Standard self-priming of 9ft, up to 25ft based on installation conditions
- AISI 304 SS pump body
- Built-in expansion tank for leak loads
- Excellent for residential or light commercial applications
- Light weight and easy to move
- Built-in check valves on suction and discharge
- TEFC Motor
- IPX-6 Cover, Outdoor Rated. Intended for domestic applications only.

• PERFORMANCE TABLE

Model	Power	Max. Flow	Max. Head	Rated Flow	Rated Head	Port Size	Lift. Max
Ocelot 25	1 HP	25 GPM	164 FT	13 GPM	92 FT	1"	9 FT
Ocelot 60	2 HP	75 GPM	230 FT	35 GPM	141 FT	2"	9 FT

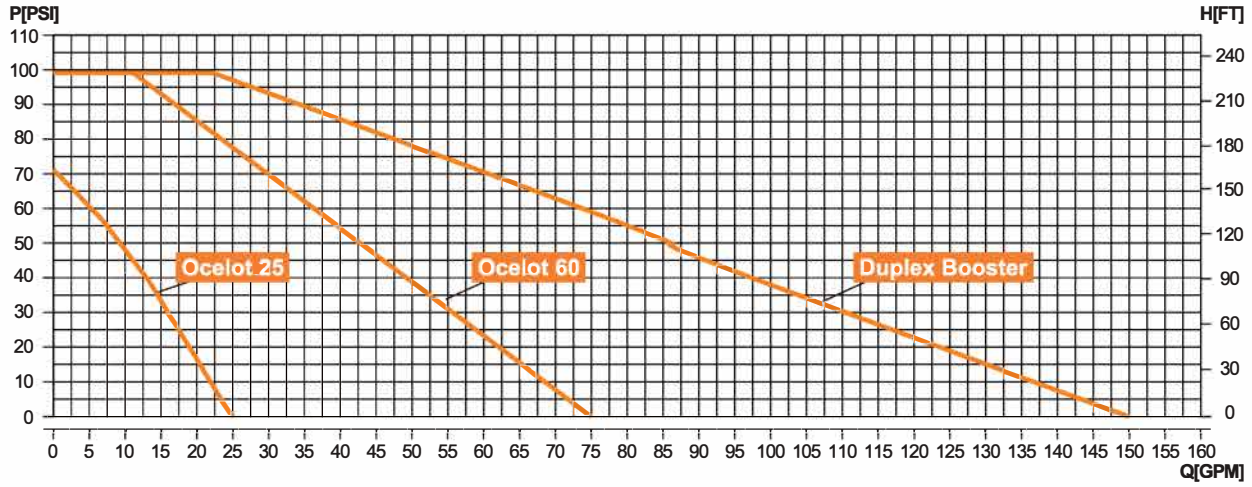

• ELECTRICAL FEATURES


Model	Voltage	Current	Frequency	Ambient Temperature	Media Temperature
Ocelot 25	120V	8.5A	60Hz	104°F	167°F
Ocelot 60	208-230V / 1PH 208-230V / 3PH	13.2 /12.5A / 1PH 7.5 /5.5A / 3PH	60Hz	104°F	167°F

4034 Mint Way | Dallas, TX 75237 (214)-337-8780 sales@tigerflow.com


OCELOT BOOSTER

• SIZE AND WEIGHT

Model	Inlet	Outlet	Size	Weight
Ocelot 25	NPT 1"	NPT 1"	15.2"x8.3"x11.7"	17.6 lbs
Ocelot 60	NPT 2"	NPT 2"	19.7"x8.8"x14.8"	53 lbs

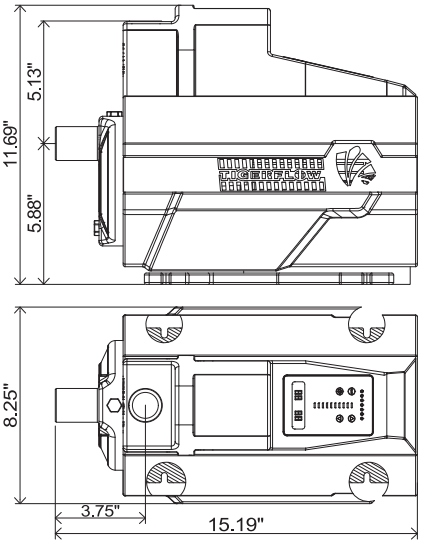


Ocelot 25

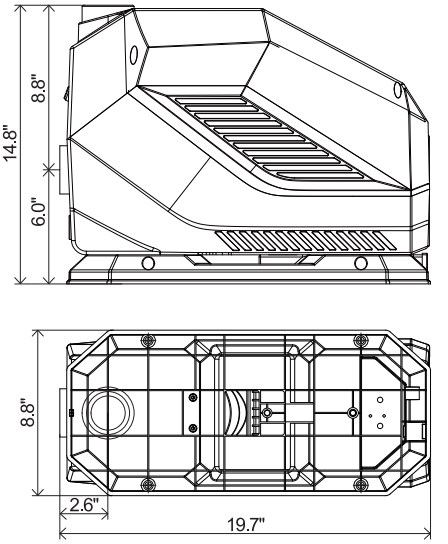

Ocelot 60

• PRODUCT DISPLAY

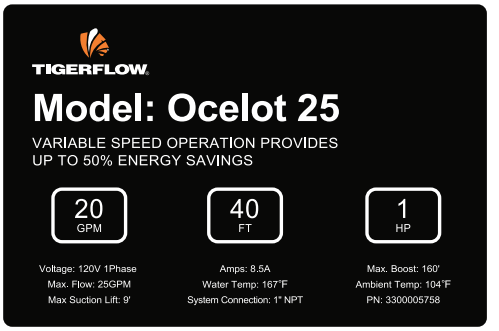



OCELOT BOOSTER


• STANDARD FEATURES


- Lead-lag automatic operation
- Constant pressure control with variable speed
- Automatic alternation
- Excellent for multi-family and other light commercial applications
- 304 Stainless steel piping
- Individual pump isolation valves
- 2.5” Grooved connections

• OPTIONS

- Bladder tank
- Pressure gauges
- Threaded and flanged connections
- Single phase power
- Three phase power

• DUPLEX BOOSTER DIMENSIONS

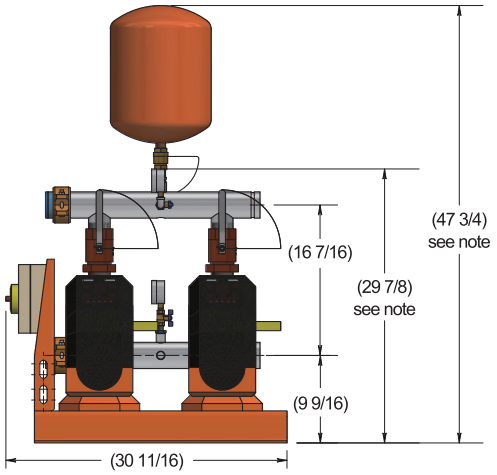

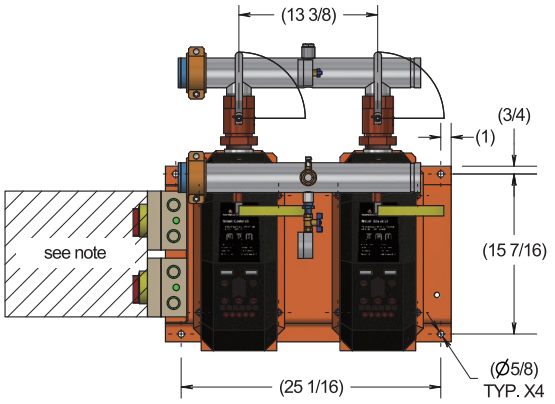

Note: Allow for working space clearance per NEC.

• PERFORMANCE TABLE

Model	Power	Max. Flow	Max. Head	Rated Flow	Rated Head	Port Size	Lift Max
Ocelot Duplex	4HP	150 GPM	230 FT	70 GPM	141 FT	2.5”	9

• ELECTRICAL FEATURES

Model	Power Feed	System FLA	Frequency	Ambient Temperature	Media Temperature
Ocelot Duplex	230V	28.2A* / 1PH 12.5A* / 3PH	60Hz	104°F	167°F

*If using single-point power feed, otherwise refer to individual pump FLA.